



## Features & Benefits

- 0-10Vdc output
- IP65 housing
- Snap-fit cover
- 24Vac/dc powered
- Link selectable output



## Technical Overview

The LL-P-V is a light level transmitter designed for use in the active control of artificial lighting, both to optimise light levels and to achieve maximum energy efficiency.

The LL-P-V transmitter uses a photo-diode cell to detect light levels in a selection of lux ranges, providing a linear 0-10Vdc output signal.

The LL-P-V is designed for outdoor mounting for the measurement of external light levels.

### Product Codes

**LL-P-V** External light level sensor, 0-10Vdc Output measuring range selectable

### Specification

Sensor reference	Photo-diode
Accuracy	±5% across range
Ranges (Switch selectable):	10-2000 Lux 10-10,000 Lux
Power supply	24Vac/dc (±10%)
Connections	3-wire
Output	0-10Vdc
Housing:	
Material	PC/GF (Halogen free, flame retardant & UV stabilized)
Dimensions	125 x 105 x 85mm
Environmental:	
Housing:	-30 to 60°C 0 to 95% non-condensing
Media:	-10 to +50°C
Protection	IP65
Country of origin	UK

#### WEEE Directive:



At the end of the products useful life please dispose as per the local regulations.  
Do not dispose of with normal household waste.  
Do not burn.



The products referred to in this data sheet meet the requirements of EU Directive 2014/30/EU

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.

#### Contact Details:

Tel: +44 1382 443000  
Fax: +44 1382 453197  
Email: [info@omni.uk.com](mailto:info@omni.uk.com)

**Mailing Address:** Unit 1, 14 Nobel Road,  
Wester Gourdie Industrial Estate,  
Dundee, DD2 4UH.

**Website:** [www.omniinstruments.co.uk](http://www.omniinstruments.co.uk)



## Installation & Connections


1. Release the snap-fit lid by gently squeezing the locking tab.
2. Feed the cable through the waterproof gland and terminate the cores at the terminal block. Leaving some slack inside the unit, tighten the cable gland onto the cable to ensure water tightness.
3. If the sensor is to be mounted outside, it is recommended that the unit be mounted with the cable entry at the bottom. If the cable is fed from above then into the cable gland at the bottom, it is recommended that a rain loop be placed in the cable before entry into the sensor.
4. Set jumper links according to output type required.
5. Snap shut the lid after the connections have been made.
6. Before powering the sensor, ensure that the supply voltage is within the specified tolerances.

### Connections

- O1P 0-10Vdc output
- GND Common 0V
- 24V Supply voltage 24Vac/dc

### Output ranges

- 10 to 2000
- 10 to 10,000

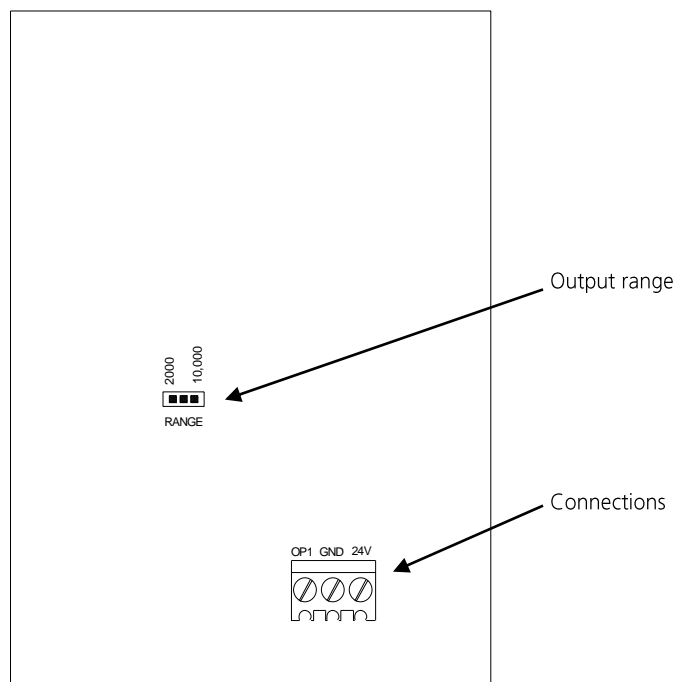

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.