


CHECKED  
AT REV. A  
RDS

7 MIN O/P POSITION

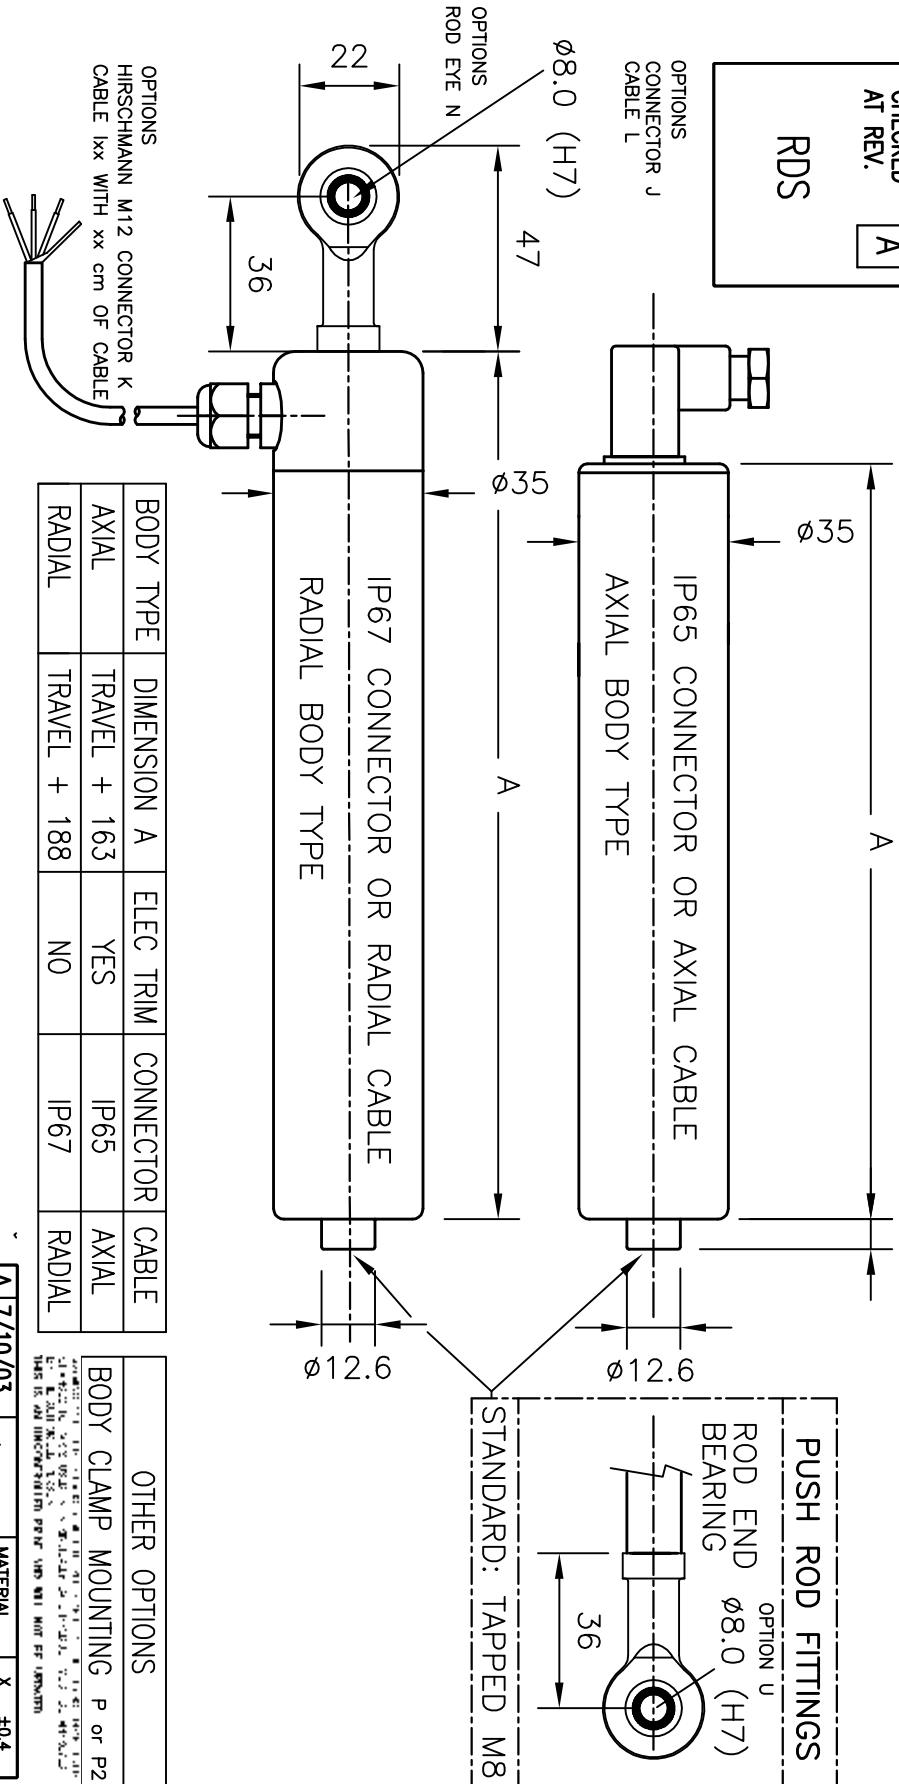

BODY TYPE	DIMENSION A	ELEC TRIM	CONNECTOR	CABLE
AXIAL	TRAVEL + 163	YES	IP65	AXIAL
RADIAL	TRAVEL + 188	NO	IP67	RADIAL

OTHER OPTIONS	
BODY CLAMP MOUNTING	P or P2

A FIRST ISSUE

A

SUPPLY OPTIONS  
 A 5V SUPPLY 0.4 TO 4.5V O/P  
 C 24V SUPPLY 0.5 TO 9.5V O/P  
 D ±15V SUPPLY ±10V O/P  
 E 2 WIRE 4 TO 20 mA  
 F 3 WIRE 4 TO 20 mA SINK  
 H 3 WIRE 4 TO 20 mA SOURCE

A 7/10/03	DESCRIPTION	MATERIAL	X ±0.4 XX ±0.2 XXX ±0.1 ALL DIMS mm
	P111	SEE NOTE 1	
	RUGGEDISED LINEAR SENSOR INSTALLATION		
SCALE 20mm	DRAWING NUMBER	REV	
	P111-11	A	
	SHEET	OF	
	1	1	