



- Monitoring relays - GAMMA series
- Monitoring of phase sequence and phase failure
- Detection of reverse voltage
- Connection of neutral wire optional
- Supply voltage = measuring voltage
- 2 change-over contacts
- Width 22.5mm
- Industrial design



Technical data

1. Functions

Monitoring of phase sequence, phase failure and detection of return voltage (by means of evaluating the asymmetry)

2. Time ranges

| | |
|----------------------------|-------------------|
| | Adjustment range |
| Start-up suppression time: | fixed, max. 500ms |
| Tripping delay: | fixed, max. 350ms |

3. Indicators

| | |
|--------------------|------------------------------|
| Green LED ON: | indication of supply voltage |
| Yellow LED ON/OFF: | indication of relay output |

4. Mechanical design

Self-extinguishing plastic housing, IP rating IP40
 Mounted on DIN-Rail TS 35 according to EN 60715
 Mounting position: any
 Shockproof terminal connection according to VBG 4 (PZ1 required), IP rating IP20
 Tightening torque: max. 1Nm
 Terminal capacity:

- 1 x 0.5 to 2.5mm² with/without multicore cable end
- 1 x 4mm² without multicore cable end
- 2 x 0.5 to 1.5mm² with/without multicore cable end
- 2 x 2.5mm² flexible without multicore cable end

5. Input circuit

| | |
|-----------------|--|
| Supply voltage: | |
| 3(N)~ 115/66V | terminals (N)-L1-L2-L3 (G2PF115VS02) (= measuring voltage) |
| 3(N)~ 230/132V | terminals (N)-L1-L2-L3 (G2PF230VS02) (= measuring voltage) |
| 3(N)~ 400/230V | terminals (N)-L1-L2-L3 (G2PF400VS02) (= measuring voltage) |

| | |
|------------------|---------------------------------|
| Tolerance: | |
| 3(N)~ 115/66V | 3(N)~ 99 to 132V (G2PF115VS02) |
| 3(N)~ 230/132V | 3(N)~ 198 to 264V (G2PF230VS02) |
| 3(N)~ 400/230V | 3(N)~ 342 to 457V (G2PF400VS02) |
| Rated frequency: | 48 to 63Hz |

| | |
|--------------------|-------------------|
| Rated consumption: | |
| 3(N)~ 115/66V | 3VA (G2PF115VS02) |
| 3(N)~ 230/132V | 6VA (G2PF230VS02) |
| 3(N)~ 400/230V | 9VA (G2PF400VS02) |

| | |
|-------------------------|--------------------------------------|
| Duration of operation: | 100% |
| Reset time: | <100ms |
| Residual ripple for DC: | - |
| Drop-out voltage: | >20% of the supply voltage |
| Overvoltage category: | III (in accordance with IEC 60664-1) |
| Rated surge voltage: | 4kV |

6. Output circuit

2 potential free change-over contacts
 Rated voltage: 250V AC
 Switching capacity (distance <5mm): 750VA (3A / 250V AC)
 Switching capacity (distance >5mm): 1250VA (5A / 250V AC)
 Fusing: 5A fast acting

| | |
|-----------------------|---|
| Mechanical life: | 20 x 10 ⁶ operations |
| Electrical life: | 2 x 10 ⁵ operations |
| Switching frequency: | at 1000VA resistive load max. 60/min at 100VA resistive load max. 6/min at 1000VA resistive load (in accordance with IEC 60947-5-1) |
| Overvoltage category: | III (in accordance with IEC 60664-1) |
| Rated surge voltage: | 4kV |

7. Measuring circuit

| | |
|--------------------|---|
| Measured variable: | AC Sinus, 48 to 63Hz |
| Input: | |
| 3(N)~ 115/66V | terminals (N)-L1-L2-L3 (G2PF115VS02) (= supply voltage) |
| 3(N)~ 230/132V | terminals (N)-L1-L2-L3 (G2PF230VS02) (= supply voltage) |
| 3(N)~ 400/230V | terminals (N)-L1-L2-L3 (G2PF400VS02) (= supply voltage) |
| Overload capacity: | |
| 3(N)~ 115/66V | 3(N)~ 132/76V (G2PF115VS02) |
| 3(N)~ 230/132V | 3(N)~ 264/152V (G2PF230VS02) |
| 3(N)~ 400/230V | 3(N)~ 457/264V (G2PF400VS02) |
| Input resistance: | |
| 3(N)~ 115/66V | 5kΩ (G2PF115VS02) |
| 3(N)~ 230/132V | 10kΩ (G2PF230VS02) |
| 3(N)~ 400/230V | 15kΩ (G2PF400VS02) |

| | |
|-----------------------|--------------------------------|
| Asymmetry: | fixed, typ. 30% |
| Overvoltage category: | III (according to IEC 60664-1) |
| Rated surge voltage: | 4kV |

8. Accuracy

| | |
|------------------------|------------------------------|
| Base accuracy: | ≤3% (of maximum scale value) |
| Frequency response: | - |
| Adjustment accuracy: | - |
| Repetition accuracy: | ≤2% |
| Voltage influence: | - |
| Temperature influence: | ≤0.05% / °C |


9. Ambient conditions

| | |
|------------------------|---|
| Ambient temperature: | -25 to +55°C (in accordance with IEC 60068-1) -25 to +40°C (in accordance with UL 508) |
| Storage temperature: | -25 to +70°C |
| Transport temperature: | -25 to +70°C |
| Relative humidity: | 15% to 85% (in accordance with IEC 60721-3-3 class 3K3) |
| Pollution degree: | 3 (in accordance with IEC 60664-1) |
| Vibration resistance: | 10 to 55Hz 0.35mm (in accordance with IEC 60068-2-6) |
| Shock resistance: | 15g 11ms (in accordance with IEC 60068-2-27) |

Functions


Phase sequence monitoring

When all the phases are connected in the correct sequence and the measured asymmetry is less than the fixed value, the output relays switch into on-position (yellow LED illuminated). When the phase sequence changes, the output relays switch into off-position (yellow LED not illuminated).

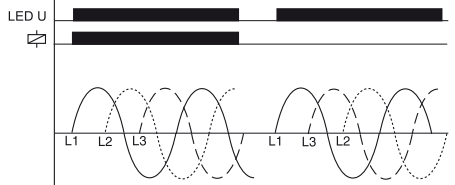


Detection of reverse voltage (by means of evaluation of asymmetry)

The output relays switch into off-position (yellow LED not illuminated) when the asymmetry between the phase voltages exceeds the fixed value of the asymmetry. An asymmetry caused by the reverse voltage of a consumer (e.g. a motor which continues to run on two phases only) does not effect the disconnection.

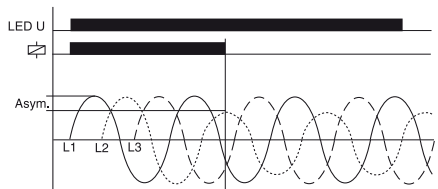


Phase failure monitoring


When one of the three phases fails, the output relays switch into off-position (yellow LED not illuminated).

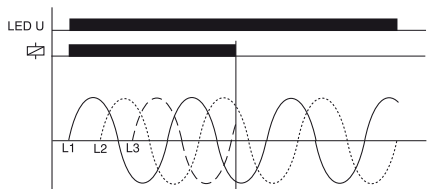

Connections

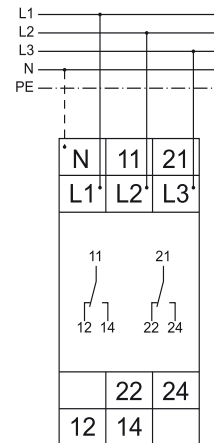

Dimensions

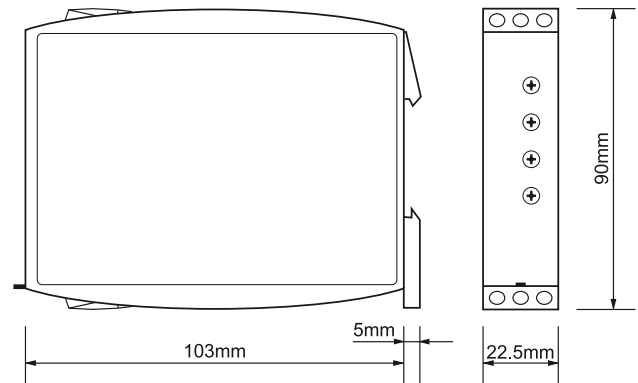

For pricing or any further information, please contact Omni Instruments Ltd.



Measurement and data acquisition solutions

Contact Details:

Tel: +44 1382 443000

Email: info@omni.uk.com

Website: www.omniinstruments.co.uk

Mailing Address:

Unit 1, 14 Nobel Road,

Wester Gourdie Industrial Estate,

Dundee, DD2 4UH.