

GRAPHTEC

Compact Standalone Datalogger

midi **LOGGER** GL260

Evolution

- Simple, Useful, Portable -

// New Service //

G-REMOTE

New service using cloud server

- Remote Control Service
- Data Storage Service

*Additional charge for use.

*The service is offered for limited areas only.

// New Features //

Alarm History Function


- Easy search of abnormal event dates and times history

Enhanced CH to CH Calculation Function

- New calculation functions have been added

Memory Loop Function

- Enables recording for longer periods of time

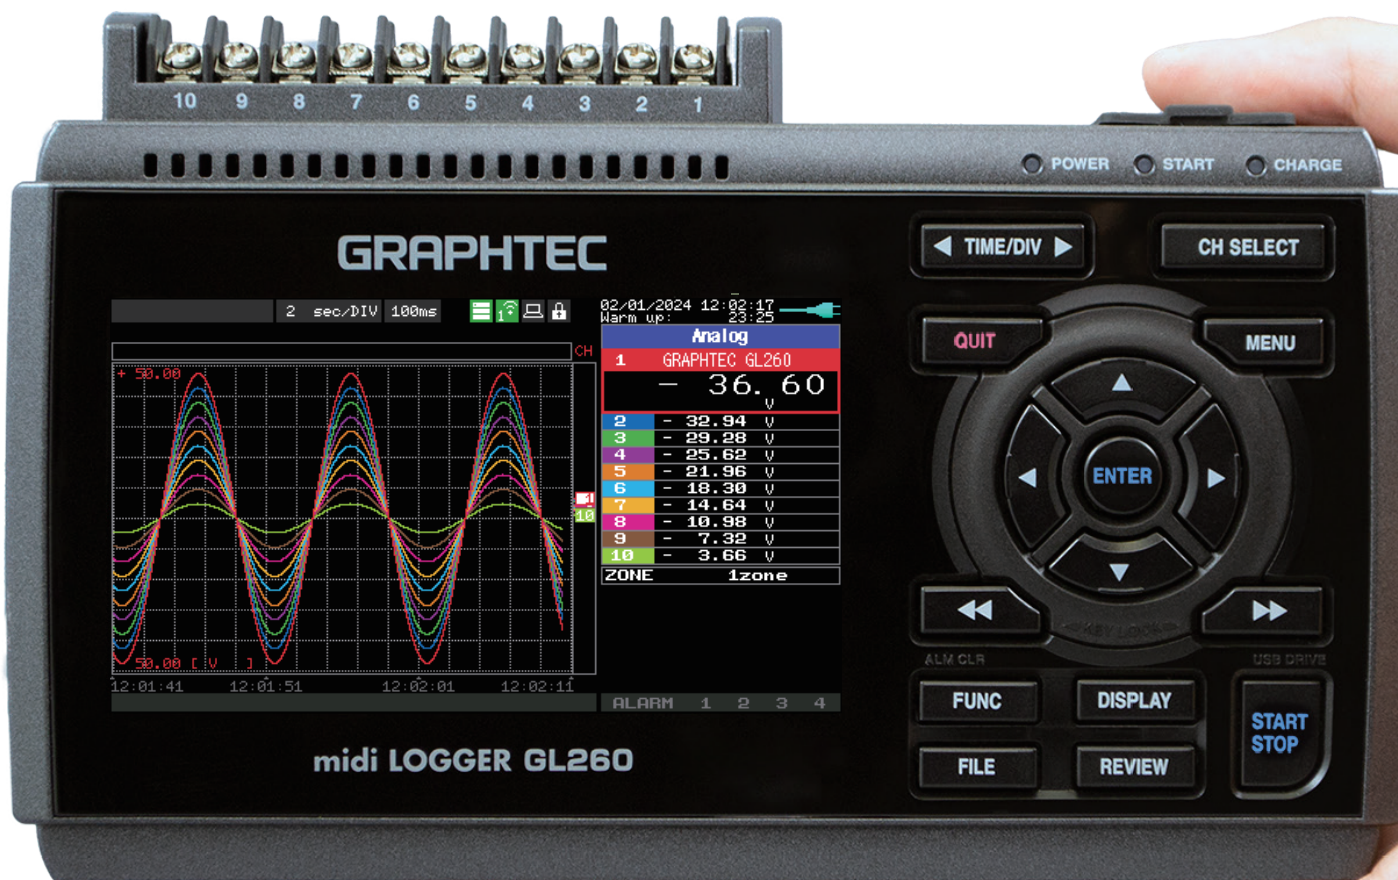

Actual Size

8GB memory for reliable long-term measurement

Recording time example (when only 10 analog channels are used, 2 GB recorded)*1

Sampling Interval*2	10ms	50ms	100ms	200ms	500ms	1s
GBD Format	41 days	88 days	103 days	207 days	Over 365	Over 365
CSV Format	3 days	12 days	18 days	36 days	91 days	182 days

*1: Recording times are approximate.

*2: Depending on the sampling interval, the number of channels are limited. 10ms: 1ch, 20ms: 2ch, 50ms: 5ch

Max Sampling Interval of up to 10ms

By narrowing down the number of channels, enabled to record data in max. 10 ms.

Sampling Interval	10ms	20ms	50ms	100ms
Number of CHs	1	2	5	10
Measuring	Voltage	✓	✓	✓
	Temp.	—	—	✓

Specifications

Item	Description
Analog input	Number of channels
	10ch / Screw terminal (M3)
	Type
	Scans channels for sampling. All channels isolated, balanced input
	Measurement range
Filter	Voltage: 20mV - 100V, 1-5V F.S.
	Thermocouple: K, J, E, T, R, S, B, N, C and (the old W: WRe5-26)
	Humidity: 0 - 100% (optional item B-530 is required)
	Off, 2, 5, 10, 20, 40 (moving average in selected number)
	Max. input voltage
External input (*1)	Between(+) / (-) terminal
	20mV - 1V range: 60V p-p
	2V - 100V range: 110V p-p
	Channels ((-) / (-)): 60 V p-p
	Channel / GND: 60 V p-p
External input (*1)	Number of channels
	Trigger of Sampling (1 channel), or External Sample Inputs 1ch Logic / Pulse (4 channel)
Pulse input	Rotation count (RPM) mode(*2), Accumulating count mode, Instant count mode
	Max. input frequency: 50kHz / Max. count: 50kc / sampling
External output (*1)	Alarm output: 4ch
Scaling function	Analog channel, Pulse channel
Sampling interval	10ms - 1h (10ms to 50ms: voltage only, limited number of CH), External signal
A/D converter	$\Delta \Sigma$ type, 16Bit (effective resolution: 1/40,000 of \pm range)
PC I/F	USB2.0, wireless LAN (optional item B-568 is required)
Storage medium (*3)	Storage
	Built-in memory: approx. 8GB, SD card slot: 1
Data format	GBD / CSV
	Capturing mode
OFF (default), Ring, Relay	Other functions
	Calculation function, Trigger, Alarm function, Data backup function(*4)
Display	4.3" TFT (WQVGA: 480 x 272 dots)
Operating environment (*5)	0 - 45°C, 5 - 85% RH
Power source	AC adaptor
	AC100 - 240V / 50 - 60Hz
	DC input
DC8.5 - 24V (optional item B-514 is required)	Battery pack
	DC7.2V(2875mAh)(optional item B-573 is required)
Power consumption	Max. 36VA (when AC100V)
Dimensions	188(W) x 117(D) x 42(H) mm
Weight	500g (excluding AC adaptor and battery pack)
Vibration resistance	Equivalent to Automobile parts Type 1 Class A

Cloud service (G-REMOTE)

(*Additional charge for use)

Item	Description
Supported OS (*6)	Windows11/10
Supported WEB browser	Google Chrome (recommended), Microsoft Edge, Firefox (*Internet browser supporting HTML5)
Service content	<Remote control service> Easy remote control and confirmation of measurement data from G-REMOTE on a browser via an Internet connection <Data save service> Storing data on Graphtec cloud servers via Internet connection * For more information about product, please check the web site.

Options

Item	Model No.	Description
GL wireless LAN unit	B-568	Standard: IEEE802.11b / g / n Communication distance: approx. 40m(Depends on the situation)
Battery pack	B-573	1 unit: 7.2V/2875mAh
Input/Output cable for GL	B-513	2m long (no clip on end of cable)
DC drive cable	B-514	2m long (no clip on end of cable)
Humidity sensor (*7)	B-530	3m long (with power plug)
Storage case for midi Logger series	B-581	Supported RoHS Directive
Ultrafine K type thermocouple	ST-55K-TC-1.2M	tip wire ϕ 0.127, 0.5X0.7X200mm, relaying 1m, -40 - 260°C, class 2, 5 units
Rod shaped thermo couple	RIC-410*	-100~300°C, Class1, Cord length 1.1 m
Shunt resistor 250 Ω	B-551-10	\pm 250 Ω (0.1%), Rated power of 1 W, Maximum operating voltage15.8V
AC adapter for GL260	ACADP-20	AC adapter for maintenance

*Not available in Europe.

Software specifications PC

Item	Description
Supported OS (*6)	Windows11/10
GL28-APS	PC for date logger settings, data recording, storage, playback Supported models: GL260/GL840/GL240 Connectable units / channels: Max. 10 units / 1,000ch
GL-Connection	GL Series Integration Software PC for date logger settings, data recording, storage, playback Supported models: GL7000/GL2000/GL980/GL840 GL240/GL260/GLT400 Connectable units: 20 Max. 2000ch

Calibration-related documents (Production Data)

Item	Code
TTEST CERTIFICATE	B-TEST
TRACERBILITY CHART	B-TRACE
CALIBRATION CERTIFICATE	B-CAL

*Documents ordered at the time of product purchase are data at the time of manufacture.

*Please visit calibration services section of our website for details.
<https://graphtec.co.jp/maintenance/kousei/>

*1: Input/Output cable for GL (option B-513) is required.

*2: The pulse count mode counts the number of pulses per sample interval and converted to revolutions per minute.

*3: Recorded in 2GB per file, SD cards available.

*Supported SDHC, up to approx. 32GB memory

*4: If the ring setting and external sampling function is ON, the backup function is not available.
If the backup destination is FTP, GL wireless LAN unit(B-568) is required.

*5: When operating with battery pack 0 to 40 °C, charging battery 15 to 35 °C

*6: OS that are no longer supported by the OS manufacturer are not supported by Graphtec.

*7: Available temperature range: -25°C~+80°C(Special order/ 10m, 15m, 20m available)

*8: Specifications are subject to change without notice as this is a commercial product.

- Due to the possibility of equipment or PC failure, the data files on the instrument will not be guaranteed to be held on the memory. Please make a back up of data whenever possible to avoid data loss.
- Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
- Items mentioned are subject to change without notice. For more information about product, please check the web site or contact your local representative.



For using equipment in correctly and safely

• Before using it, please read the user manual and then please use it properly in accordance with the description.

• To avoid malfunction or an electric shock by current leakage or voltage, please ensure a ground connection and use according to the specification.

For pricing or any further information, please contact Omni Instruments Ltd.



Contact Details:

Tel: +44 1382 443000

Email: info@omni.uk.com

Website: www.omniinstruments.co.uk

Mailing Address:

Unit 1, 14 Nobel Road,
Wester Gourdie Industrial Estate,
Dundee, DD2 4UH.

