

-40

IP Rating

Response Time Water

Sensor & Cable

Connector

Temperature rating

Temperature rating

Weight

-20

Physical Specification

0

20

40

60

IP68 (waterproof) to a depth of 1m.

45 Seconds (typical to 90% FSD)


-40 ℃ to +105 ℃ (-40 °F to +221 °F)

-25 °C to 85 °C (-13 °F to 185 °F)


150g (1.5m cable version)

80

Encapsulated Thermistor Probe PB-5015-1M5/3M/10M





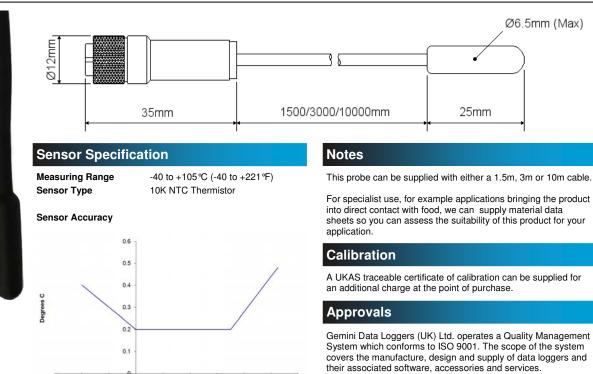

120

100



Related Products This probe is suitable for use with the following products: Tinytag Ultra 2 model numbers: TGU-4020, TGU-4510 Tinytag Plus 2 model numbers:

TGP-4020, TGP-4510, TGP-4520

Tinytag View 2 model numbers:

TV-4020, TV-4510



UK / Europe Office Tel +44 (0)845 9000 601 Fax +44 (0)845 9000 602 info@omni.uk.com www.omniinstruments.co.uk Australia / Asia Pacific Office Tel +61 (0)282 442 363 Fax +61 (0)294 751 278 info@omniinstruments.com.au www.omniinstruments.com.au USA / Canada Office Tel +1-866-849-3441 Fax +1-866-628-8055 info@omniinstruments.net www.omniinstruments.net