

# UNIVERSAL I/f CONVERTER



- Input for RTD, TC, Ohm, potentiometer, mA and V
- Frequency output NPN, PNP and TTL
- Generates frequencies from 0.001...25000 Hz
- 2-wire supply > 16 V
- Universal AC or DC supply



## Advanced features:

- Programmable via detachable display front (4501), process calibration, signal simulation, password protection, error diagnostics and selection of help text in several languages.

## Application:


- Linearised, electronic temperature measurement with RTD or TC sensor.
- Conversion of linear resistance variation to a frequency signal, e.g. from solenoids and butterfly valves or linear movements with attached potentiometer.
- Power supply and signal isolator for 2-wire transmitters.
- Process control by way of a frequency signal transmitted to e.g. a PLC or a process computer.
- Galvanic separation and conversion of analogue signals to frequency signals.

## Technical characteristics:


- When 4222 is used in combination with the 4501 display / programming front, all operational parameters can be modified to suit any application. As the 4222 is designed with electronic hardware switches, it is not necessary to open the module for setting of DIP switches.
- A green front LED indicates normal operation.
- Continuous check of vital stored data for safety reasons.
- 3-port 2.3 kVAC galvanic isolation.

## Applications


### Input signals:

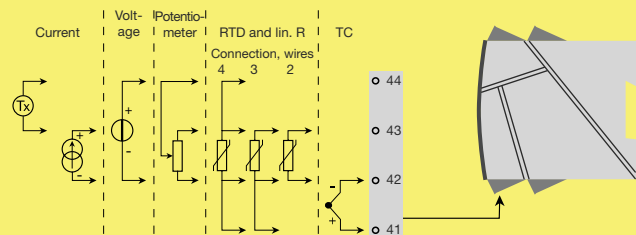

### Output signals:

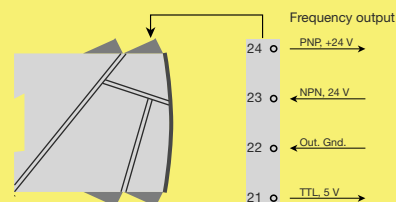

### Supply:

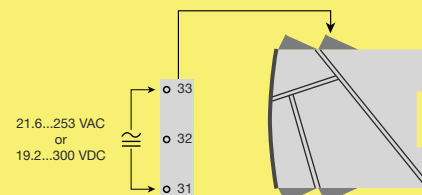

## Order codes:

4222 = Universal I/f converter

4501 = Display / programming front

## PR 4501 Display / programming front



### Application:

- Communications interface for modification of operational parameters in 4222.
- Can be moved from one 4222 module to another and download the configuration of the first converter to subsequent converters.
- Fixed display for readout of process data and status.

### Technical characteristics:

- LCD display with 4 lines; line 1

(H = 5.57 mm) shows input signal, line 2 (H = 3.33 mm) shows units. Line 3 alternates between digital output value and scaling (kHz, Hz, mHz, P/m, P/h, P/d) or shows TAG no. Line 4 shows tendency readout for the input signal and communication status.

- Programming access can be blocked by assigning a password. The password is saved in the converter in order to ensure a high degree of protection against unauthorised modifications to the configuration.

### Mounting / installation:

- Click 4501 onto the front of 4222.

### Electrical specifications:

Specifications range..... -20°C to +60°C

### Common specifications:

Supply voltage, universal ..... 21.6...253 VAC, 50...60 Hz or 19.2...300 VDC  
 Max. consumption..... ≤ 2.5 W  
 Fuse..... 400 mA SB / 250 VAC  
 Isolation voltage, test / operation..... 2.3 kVAC / 250 VAC  
 Communications interface ..... Programming front 4501  
 Signal / noise ratio..... Min. 60 dB (0...100 kHz)  
 Response time (0...90%, 100...10%), programmable:  
 Temperature input ..... 1...60 s  
 mA / V input..... 0.4...60 s  
 Calibration temperature..... 20...28°C  
 Accuracy, the greater of the general and basic values:

General values		
Input type	Absolute accuracy	Temperature coefficient
All	≤ ±0.1% of span	≤ ±0.01% of span / °C

Basic values		
Input type	Basic accuracy	Temperature coefficient
mA	≤ ±4 µA	≤ ±0.4 µA/°C
Volt	≤ ±20 µV	≤ ±2 µV/°C
Pt100	≤ ±0.2°C	≤ ±0.01°C/°C
Linear resistance	≤ ±0.1 Ω	≤ ±0.01 Ω/°C
Potentiometer	≤ ±0.1 Ω	≤ ±0.01 Ω/°C
TC type: E, J, K, L, N, T,	≤ ±1°C	≤ ±0.05°C/°C
TC type: B, R, S, W3, W5, LR	≤ ±2°C	≤ ±0.2°C/°C

EMC immunity influence .....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst .....	< ±1% of span

### Auxiliary supplies:

2-wire supply (terminal 44...43) ..... 25...16 VDC / 0...20 mA  
 Max. wire size..... 1 x 2.5 mm<sup>2</sup> stranded wire  
 Screw terminal torque ..... 0.5 Nm  
 Relative humidity ..... < 95% RH (non-cond.)  
 Dimensions, without 4501 (HxBxD)... 109 x 23.5 x 104 mm  
 Dimensions, with 4501 (HxBxD)..... 109 x 23.5 x 116 mm  
 Protection degree (encl. / terminals)... IP50 / IP20  
 Weight ..... 155 g / 170 g with 4501

### RTD, linear resistance and potentiometer input:

Input type	Min. value	Max. value	Standard
Pt100	-200°C	+850°C	IEC60751
Ni100	-60°C	+250°C	DIN 43760
Lin. resistance	0 Ω	10000 Ω	-
Potentiometer	10 Ω	100 kΩ	-

Cable resistance p. wire (max.), RTD .. 50 Ω  
 Sensor current, RTD ..... Nom. 0.2 mA  
 Sensor error detection, RTD..... Yes  
 Short circuit detection, RTD ..... < 15 Ω

### TC input:

Type	Min. value	Max. value	Standard
B	+400°C	+1820°C	IEC 60584-1
E	-100°C	+1000°C	IEC 60584-1
J	-100°C	+1200°C	IEC 60584-1
K	-180°C	+1372°C	IEC 60584-1
L	-200°C	+900°C	DIN 43710
N	-180°C	+1300°C	IEC 60584-1
R	-50°C	+1760°C	IEC 60584-1
S	-50°C	+1760°C	IEC 60584-1
T	-200°C	+400°C	IEC 60584-1
U	-200°C	+600°C	DIN 43710
W3	0°C	+2300°C	ASTM E988-90
W5	0°C	+2300°C	ASTM E988-90
LR	-200°C	+800°C	GOST 3044-84

Cold junction compensation (CJC)  
 via internally mounted sensor ..... < ±1.0 °C  
 Sensor error detection, all TC types.. Yes  
 Sensor error current, when detecting. Nom. 2 µA  
 else ..... 0 µA

### Current input:

Measurement range ..... -1...25 mA  
 Program. measurement ranges ..... 0...20 and 4...20 mA  
 Input resistance..... Nom. 20 Ω + PTC 50 Ω

### Voltage input:

Measurement range ..... -20 mV...12 VDC  
 Program. measurement ranges ..... 0/0.2...1, 0/0.5...2.5,  
 0/1...5, 0/2...10 V  
 Input resistance ..... Nom. 10 MΩ

### Frequency output:

Frequency range ..... 0...25000 Hz  
 Min. frequency (span)..... 0.001 Hz

### PNP output:

I<sub>out</sub> max..... 30 mA  
 V<sub>out</sub> ..... 24 VDC ± 10%  
 C<sub>out</sub>..... 10 nF  
 R<sub>out</sub> typ..... 20 Ω  
 Electromechanical counter..... 24 V / 135 mA / 20 ms

### NPN output:

I<sub>sink</sub> max..... 150 mA  
 I<sub>sink</sub> max. peak..... 300 mA  
 External voltage (terminal 23) max. ... 55 VDC  
 C<sub>out</sub>..... 10 nF  
 R<sub>out</sub> typ..... 10 Ω

### TTL output:

I<sub>sink/source</sub> max..... 15 mA  
 I<sub>sink/source</sub> peak..... 100 mA  
 V<sub>out</sub> ..... 5 V ±5%  
 C<sub>out</sub>..... 10 nF  
 R<sub>out</sub> typ..... 55 Ω

### Sensor error detection:

Programmable..... 0...26250 Hz

### Observed authority requirements: Standard:

EMC 2004/108/EC  
 Emission and immunity ..... EN 61326-1  
 LVD 2006/95/EC ..... EN 61010-1  
 UL, Standard for Safety..... UL 508

of span = of the currently selected measurement range