

FS5100 Series

FLOW SWITCH - *High Flow Gas*

Adjustable Gas Series - Range 1 slpm to 700 slpm



FS5100 Series Flow Switch - *High Flow*
available with 1/4 and 1/2 NPT Connections
with optional Explosion Proof Cap

FEATURES

- ◆ Fully Field Adjustable
- ◆ Operates in any Orientation
- ◆ Operating Temperature
-40°F to +220°F
(-40°C to +105°C)
- ◆ Operating Pressure
1000 psig (68 bar)
- ◆ 316 Stainless Steel Construction
- ◆ Shock and Vibration Resistant
- ◆ Contamination Resistant
- ◆ 1/4 & 1/2 NPT Connections
- ◆ Optional Explosion Proof
- ◆ **CE** compliant

Applications

- ◆ Purge flow fault monitor
- ◆ Toxic or hazardous gases
- ◆ Flammable or pyrophoric gases
- ◆ Chemical analyzers
- ◆ Oxygen systems


The FS5100 Series Flow Switch - *High Flow* is designed to precisely detect increasing or decreasing flow rate of gases for critical processes. The electrical switch is operated by a high energy permanent magnet. The permanent magnet is totally encapsulated by 316 stainless steel, utilizing the patented **Autoseal** process, providing a continuous, impenetrable barrier of 316 stainless steel, which is chemically resistant to even the most aggressive chemical action. The linear, high resolution adjustment allows for precise settings. The compact construction is ideal for high density system packaging.

FS5100 Series

FLOW SWITCH - *High Flow Gas*

SPECIFICATIONS

- ◆ Switch Assembly - SPDT UL 61760
- ◆ 100 VDC, 120 VAC max.
- ◆ 3 Watts resistive max. continuous
- ◆ 0.25 Amp. max. continuous
- ◆ 3.30 VA max. - 100 VDC
- ◆ 2.46 VA max. - 120 VAC
- ◆ 0.20 Ohm max contact resistance
- ◆ Adjustable Flow Rate Setpoint*
(see table)
- ◆ Fluid Media: Gases including
corrosives
- ◆ Pressure: 1000 psig max. (207 bar)
- ◆ Differential Pressure at set point:
-5, -8: 1.0 psi max.
-6, -9: 5.0 psi max.
- ◆ Operating Temperature:
-40°F to 220°F (-40°C to 105°C)
- ◆ Leakage: 1x10⁻⁷ cc/sec He max.
- ◆ Set Point Accuracy: ±1%
- ◆ Response Time: 10 milliseconds max.
- ◆ Deactuation (reset): less than 12% of
actuation set point
- ◆ Internal Filter: 40 micron
- ◆ Materials:
Body and wetted parts: 316 St Stl
Spring: Inconel X
Seals: As specified

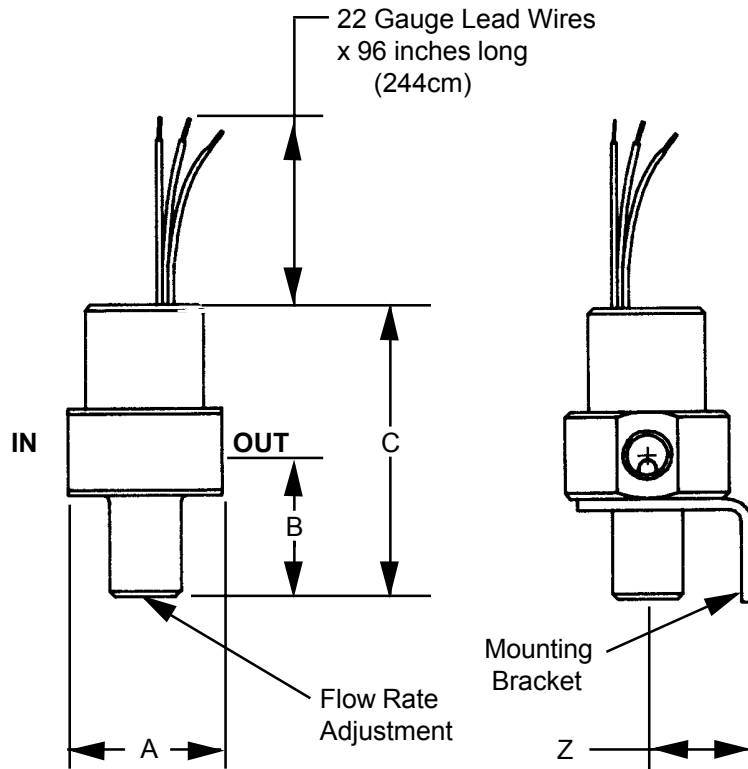

Series	Pressure Ports	Dimensions				Adjustable* Flow Rate
		A	B	C	Z	
FS5104	1/4 NPT	1.63	1.56	3.12	1.13	-5
						-6
FS5108	1/2 NPT	2.25	2.24	3.89	1.63	-8
						-9

ORDERING INFORMATION

Part Number Example: **FS5104 C V - 5 M X**


Basic Series: _____
 FS5104 - 1/4 NPT
 FS5108 - 1/2 NPT

Material: _____
 C = 316 Stainless Steel

Seal Material: _____
 V = Viton®
 B = Buna - N
 E = Ethylene Propylene
 K = Kalrez®

Optional Explosion Proof Cap
 Optional Mounting Bracket
 Adjustable Flow Range*
 (see table)

ELECTRICAL SCHEMATIC

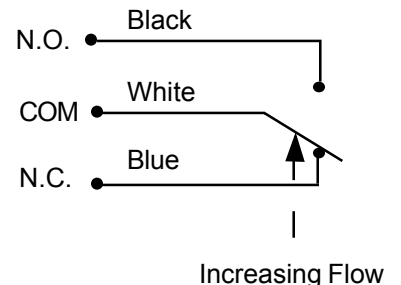

* Adjustable Flow Rate Set Point Nitrogen @ 5 psig (0.34 bar)