

Adjustable Gas Series for High Temperatures

Designed to precisely detect increasing or decreasing flow rate of gases in critical processes. Typical applications include process analyzer sample conditioning systems, critical purge monitors, excess flow safety, and oxygen and specialty gas systems. The field adjustable poppet allows for precise settings. The miniature, compact construction is ideal for high density system packaging.

Made in the USA.

Hazardous Location Service:

- CSA Certified Class I, Div 1&2, Groups A, B, C, D
Class II, Div 1&2, Groups E, F, G
Class III

Features:

- Fully Field Adjustable
- Operates In Any Orientation
- 316 Stainless Steel Construction
- Shock and Vibration Resistant
- 1/8 and 1/4 NPT connections

Specifications:

- Switch Assembly SPDT UL 61760
- Voltage 100 VDC, 120 VAC max
- Contact Rating 3 Watts resistive max continuous
- Current Switching 0.25 Amp max continuous
- Power 3.30 VA max - 100 VDC
2.46 VA max - 120 VAC
- Contact Resistance 0.20 Ohm max contact resistance
- Fluid Media Gases (including Corrosives)
- Pressure 3000 psig max (207 bar)
- Max Ambient Temperature +220°F (+104°C)
- Filter 40 micron
- Weight .45 lbs (205 grams)



Models FS6202 & FS6204

Materials:

- Body & Wetted Parts 316 Stainless Steel, Hastelloy, Monel or Titanium
- Spring Inconel X750
- Seals See **Ordering Information**

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.


Contact Details:

Tel: +44 845 9000 601
Fax: +44 845 9000 602
Local Tel: 01382 443000
Email: info@omni.uk.com


Mailing Address:

Suite E, East Kingsway Business Centre,
Mid Craigie Trading Estate, Mid Craigie Road,
Dundee, DD4 7RH, UK

Dimensions:

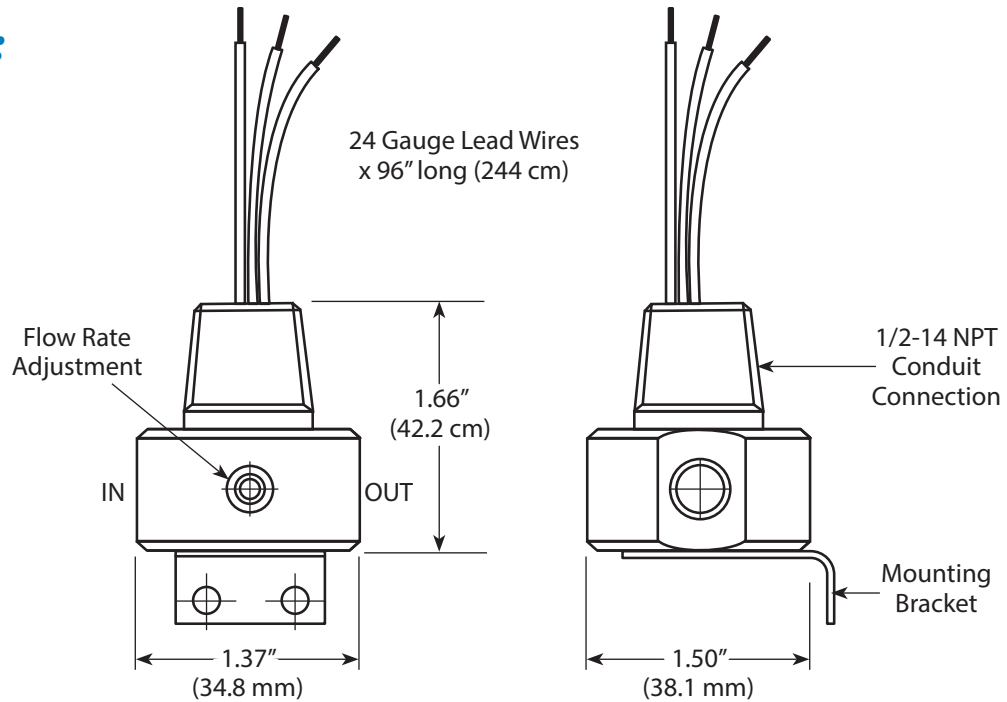

Electrical Schematic:

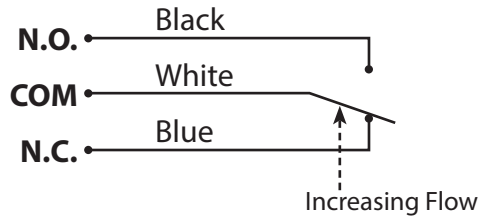

Ordering Information:

FS6202 C V - 1 M

Basic Series

FS6202	1/8 NPT
FS6204	1/4 NPT

Material

C	316 Stainless Steel
H	Hastelloy
M	Monel
T	Titanium

Seal Material

V	Viton®	-20°F (-29°C) to +220°F (+104°C)
B	Buna-N	-40°F (-40°C) to +220°F (+104°C)
E	Ethylene Propylene (EPR)	-40°F (-40°C) to +220°F (+104°C)
K	Kalrez	+30°F (-1°C) to +220°F (+104°C)

Optional Mounting Bracket

Adjustable Flow Range *

-1	30 sccm to 10 slpm
-3	1 slpm to 20 slpm

*Adjustable Flow Rate Set Point @ 5 psig (0.34 bar)

rev041316

For pricing or any further information, please contact Omni Instruments Ltd.

Contact Details:

Tel: +44 845 9000 601
 Fax: +44 845 9000 602
 Local Tel: 01382 443000
 Email: info@omni.uk.com

Mailing Address:

Suite E, East Kingsway Business Centre,
 Mid Craigie Trading Estate, Mid Craigie Road,
 Dundee, DD4 7RH, UK