



Pa600 Industrial Pressure Sensor

Key Features:

- Ranges 0-500mbar up to 0-700bar
- Outputs: 4-20mA, 0-5Vdc, 0-10Vdc, 0.5-4.5Vdc, mV/V
- Sealed to IP65 (IP67 optional)
- Accuracy: $<\pm 0.25\%/FS$ (0.1% option)
- Gauge, Sealed Gauge or Absolute Reference Versions
- Excellent Chemical and Abrasion Resistance
- Rugged Construction
- Low Power Consumption
- UKAS Traceable Calibration Certificate Included (UKAS Laboratory Certificate Optional)
- 3 Year Warranty



The Pa600 series of industrial pressure sensors are designed for measurement of gas and liquid pressure across a wide range of general purpose and industrial applications. Constructed from stainless steel, they are designed to be extremely rugged yet compact.

As standard the Pa600 comes with: Viton O-ring, 303 stainless steel case, ceramic diaphragm (96% aluminium oxide Al_2O_3) and a G $\frac{1}{4}$ inch male process connection. Alternate case, O-ring material and process connections are available including G $\frac{1}{4}$ " female and $\frac{1}{4}$ " NPT male.

The Pa600 series provides a wide choice of electrical outputs from its ASIC-based amplifier circuit, these include 4-20mA, 0-5Vdc, 0-10Vdc, 10mV/V and 20mV/V, as well as a ratiometric 0.5-4.5Vdc (10% to 90% of supply voltage) signal that requires a 5Vdc (2.7 - 5.5Vdc acceptable) to suit most dataloggers. The Pa600 series can also be supplied with any of our wide range of instrumentation to give you a complete calibrated system.

In addition, we can offer complete customisation to suit your application, please contact our technical sales team. Why not have a look at our full range of pressure sensors?

Options:

- Interim Pressure Ranges
- Manufacturing Materials
- Special Output Scaling
- Cable Gland, 6-Pin Bayonet Connector or M12x1 Connector Electrical Connections
- Improved Accuracy (NL&H) : $<\pm 0.10\%/FS$ (BFSL)
- Improved Thermal Zero Stability: $<\pm 0.02\%$ or $<\pm 0.01\%/Span/^{\circ}C$
- Supplied with Instrumentation and Calibrated as a Complete System with Traceable Certificate
- 316L Stainless Steel Case (Other Materials on Request)
- Cleaning for Oxygen Service

Applications:

- Hydraulics
- Research & Development
- Food Processing
- Plant and Machine Engineering
- Energy Industry
- Environmental Engineering (Water/Sewage/ Recycling)
- Medical Technology
- Meteorology
- OEM Installations
- Data Loggers
- Lab Research
- Aerospace Testing

For pricing or any further information, please contact Omni Instruments Ltd.



Specification:

Input Pressure Range													
Nominal Pressure Range	Bar (gauge, absolute or sealed gauge)	0-0.5	0-1	0-2	0-5	0-10	0-20	0-50	0-100	0-250	0-400	0-600	0-700
Compound Ranges	Bar	-	-1...0*	-1...+2*	-1...+5	-1...+9	-1...+19	-1...+29	-	-	-	-	-
Permissible Overpressure	Bar	1	2	4	10	20	40	100	200	400	575	800	800
Burst Pressure	Bar	2	4	5	12	25	50	120	250	500	650	950	950
* $\leq \pm 0.1\%$ / FS (BFSL) accuracy not possible in this range													
Output Signal & Supply Voltage	Wiring System	Output			Supply Voltage			Input Current	Input Resistance	Output Resistance			
Pa642	2 - wire	4 - 20 mA			9 - 32 Vdc			n/a	<500	<500			
Pa605	3 - wire	0 - 5V dc			9 - 32 Vdc			<10 mA	<500	<500			
Pa6010	3 - wire	0 - 10V dc			13 - 32 Vdc			<10 mA	<500	<500			
Pa645	3 - wire	0.5 to 4.5V dc			5 Vdc (2.7 - 5.5Vdc)			<3 mA	<500	<500			
Pa602	4 - wire	Passive mV/V (un-rationalised)			2 - 30 Vdc			<1 mA @ 10V	<11000	<11000			
Pa607	4 - wire	2mV/V (rationalised)			2 - 30 Vdc			<1 mA @ 10V	<11000	<11000			
Pa610	4 - wire	10mV/V (amplified)			3 - 12 Vdc			<3 mA typ.	<11000	<2000 nom.			
Pa620	4 - wire	20mV/V (amplified)			3 - 12 Vdc			<3 mA typ.	<11000	<2000 nom.			
Performance													
Accuracy (non-linearity, hysteresis, repeatability)		% Full Scale Output			< ± 0.25 (BFSL) < ± 0.1 (BFSL) optional								
Zero Balance		$\pm\%$ of Rated Output			<1.0								
Setting Errors (offsets)		2-wire, 3-wire 4-wire rationalised 4-wire un-rationalised			Zero & Full Scale, < $\pm 0.5\%$ / FS Zero <0.2mV/V, span $\pm 1\%$ Zero <0.1mV/V, Span $\pm 30\%$								
Permissible Load		2-wire 3-wire 4-wire			Rmax = $[(VS - VS_{min}) / 0.02] \Omega$ Rmin = 10 k Ω Rmin = 11 k Ω								
Influence Effects		Supply Effects Load Effect			mV/V & 0.5 to 4.5V - Ratiometric, Other Voltage Outputs - <0.005 % FS / 1V 4-20mA = <0.05 % FSO / k Ω								
Response Time (10% - 90%)		ms			≤ 1 (mV/V versions) ≤ 10 (amplified versions)								
Warm-Up Time (amplified versions only)		ms			2 typ.								
Permissible Temperatures & Thermal Effects													
Media Temperature		$^{\circ}\text{C}$			-40 to +135								
Ambient Temperature		$^{\circ}\text{C}$			-20 to +85								
Storage Temperature		$^{\circ}\text{C}$			-20 to +85								
Compensated Temperature Range		$^{\circ}\text{C}$			+20 to +80								
Thermal Zero Shift (TZS)		% / FS / $^{\circ}\text{C}$			< ± 0.04 (standard) < ± 0.02 (option) < ± 0.01 (option)								
Thermal Span Shift (TSS)		% output / $^{\circ}\text{C}$			<0.015								
Electrical Protection													
Reverse Polarity Protection					No damage but also no function								
Electromagnetic Compatibility					CE Compliant								
Insulation Resistance		Megohms Ω at 50V dc			>500								
Mechanical Stability													
Shock					100 g / 11 ms								
Vibration					10 g RMS (20 ... 2000 Hz)								

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.


For pricing or any further information, please contact Omni Instruments Ltd.

Specification:


Materials		
Housing & process connection		303 Stainless Steel 316L Stainless Steel (optional)
'O' ring seals		Viton NBR/Nitrile (optional) EPDM (optional) Chemraz (optional)
Diaphragm		Ceramic Al ₂ O ₃ 96 %
Media wetted parts		Housing and process connection, 'O' ring seal, diaphragm
Misc		
Weight	grams	100 nominal
Installation position		Any
Operational life	pressure cycles	> 100 x 10 ⁶
Environmental Protection	Mini Plug + Socket M12 x 1 Connector Cable Gland	IP65 Gauge Reference ≤ 50bar : IP65 / Absolute, Sealed Gauge or >50bar Range : IP67 IP65

Dimensions (mm):

Pa600 with IP65 Cable Gland


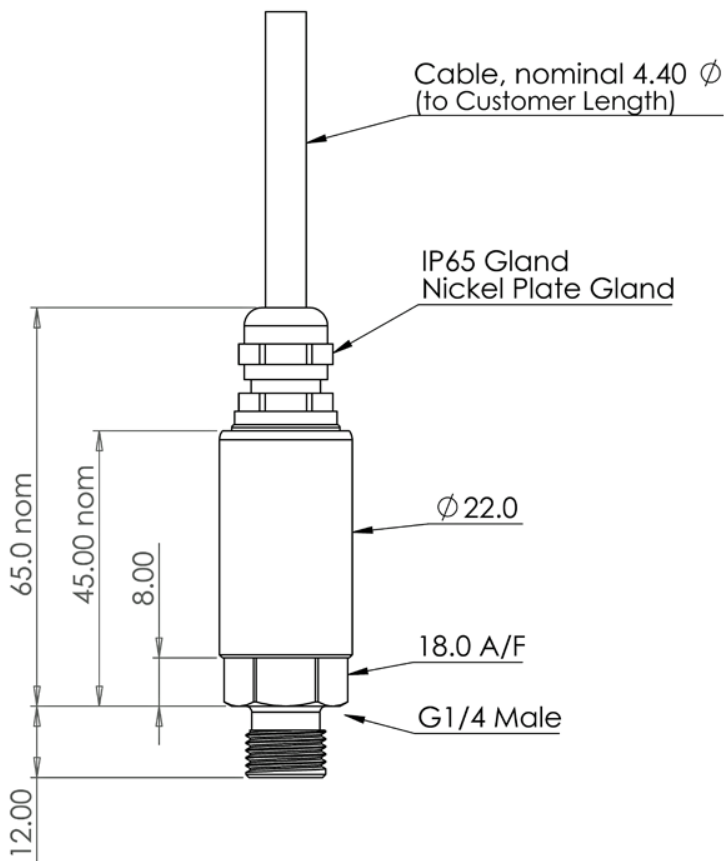


Pa600 with M12 Connector

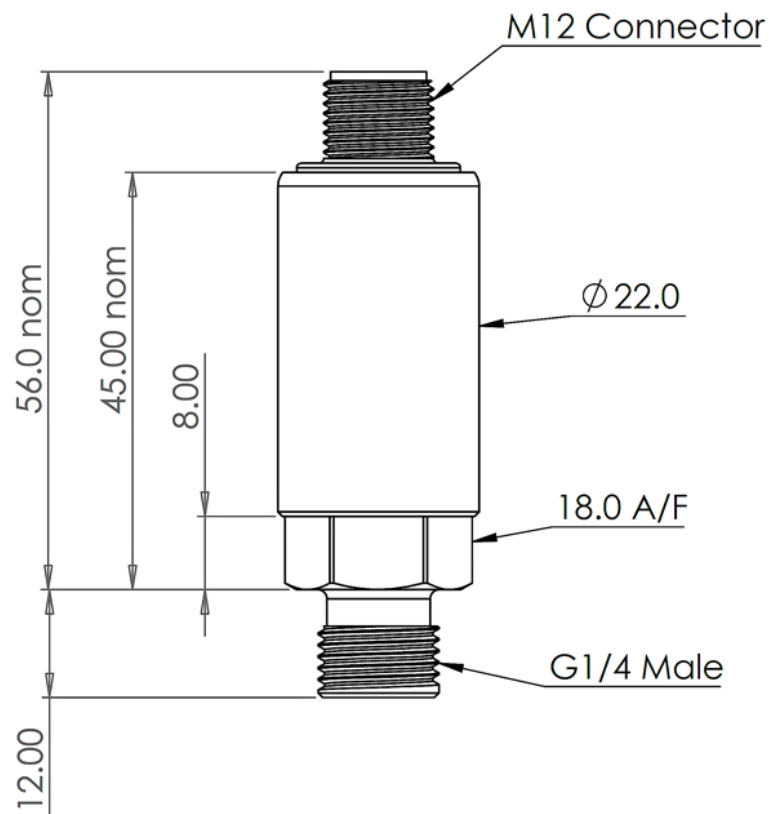

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.

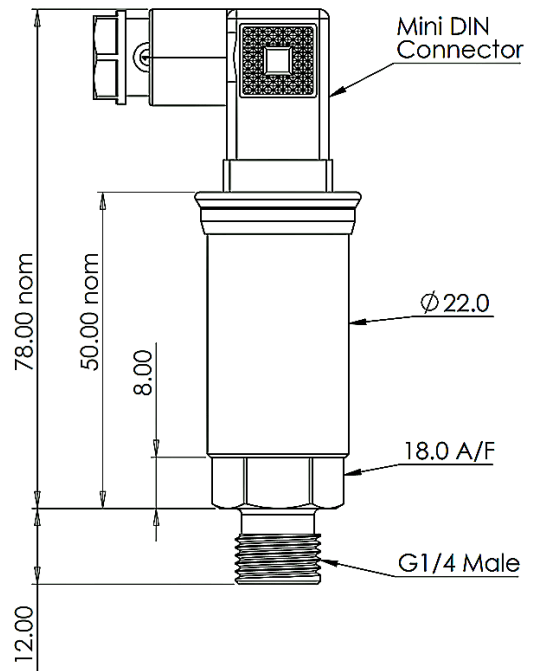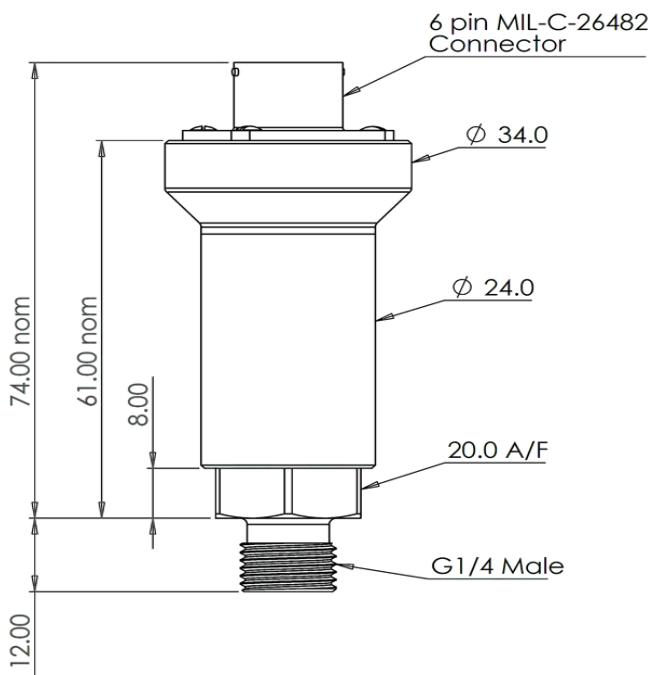

Wiring Designation:

		Small Plug & Socket	IP65 Cable	M12x1, 4-pin Connector	6-pin Bayonet Connector
2 - wire	+ve Supply -ve Supply Ground	Pin 1 Pin 2 Earth Pin	Red Blue Green	Pin 1 Pin 2 Pin 3	Pin A Pin B Pin C
3 - wire	+ve Supply -ve Supply +ve Output Ground	Pin 1 Pin 2 Pin 3 Earth Pin	Red Blue Green Yellow	Pin 1 Pin 2 Pin 3 Pin 4	Pin A Pin B Pin C Pin D
4 - wire	+ve Supply -ve Supply +ve Output -ve Output	Pin 1 Pin 2 Pin 3 Earth Pin	Red Blue Green Yellow	Pin 1 Pin 2 Pin 3 Pin 4	Pin A Pin B Pin C Pin D

Associated Products:



TR150 Handheld Indicator



T24 Wireless Telemetry Range



Intuitive4-P Process Input Panel Mount Indicator



FUSION Large Digital Display

For pricing or any further information, please contact Omni Instruments Ltd.



Ordering Codes:

Pa642P-10barg-A4AV-00-000	Pa6	42	P	-	10barg	-	A	4	A	V	-	00	-	000
Product Family														
Pa6	Pa6													
Electrical Output														
02 = mV/V un-rationalised		02												
07 = 2mV/V		07												
10 = 10mV/V		10												
20 = 20mV/V		20												
42 = 4-20mA (2-wire)		42												
45 = 0.5-4.5Vdc ratiometric (5V excitation)		45												
05 = 0-5Vdc		05												
010 = 0-10Vdc		010												
Electrical Connection / ATEX Certification														
P = Mini DIN Plug & Socket			P											
C = IP65 Cable Gland + Screened, Un-Vented PVC Cable			C											
M = M12x1 4-pin Connector			M											
MM = M12x1 4-pin Connector + Mating Half			MM											
BL = 6-pin Bayonet-Lock Mil-Spec Connector			BL											
BLM = 6-pin Bayonet-Lock Mil-Spec Connector + Mating Half			BLM											
Pressure Range														
10barg = 0 to 10bar gauge					10barg									
M1P1barg = -1 to +1bar gauge					M1P1barg									
P15P500psia = +15 to +500psi absolute					P15P500psia									
2400psig = 0 to 2400psi gauge					2400psig									
Accuracy (Non-Linearity & Hysteresis)														
A = $\pm 0.25\%/FS$ (standard)							A							
B = $\pm 0.1\%/FS$							B							
Zero Temperature Compensation (TZS)														
4 = $\pm 0.04\%/FS/^{\circ}C$								4						
2 = $\pm 0.02\%/FS/^{\circ}C$								2						
1 = $\pm 0.01\%/FS/^{\circ}C$								1						
<i>Continued on next page</i>														

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.



Ordering Codes (Continued):

Pa642P-10barg-A4AV-00-000	Pa6	42	P	-	10barg	-	A	4	A	V	-	00	-	000
Process Connection														
A = G¼" Male DIN 3852 in 303 St/Steel									A					
B = G¼" Male DIN 3852 in 316L St/Steel									B					
C = ¼" NPT Male in 303 St/Steel									C					
D = 7/16 UNF-20 Male in 3030 St/Steel									D					
E = G¼" Female in 303 St/Steel									E					
F = G¼" Male DIN 3852 in PVDF (Polyvinylidene Fluoride)									F					
G = G¼" Male with 60° Internal Cone in 303 St/Steel									G					
I = G¼" Male DIN 3852 in UNS S31803 Duplex St/Steel									I					
J = G¼" Male DIN 3852 with Snubber in 303 St/Steel									J					
K = ¼" NPT Male in PVDF (Polyvinylidene Fluoride)									K					
M = G1/8" Male DIN 3852 in 303 St/Steel									M					
S = 9/16 UNF Internal (no bleed hole) in St/Steel									S					
O-Ring Material														
V = Viton (FKM)										V				
N = Nitrile (NBR)										N				
E = EPDM (Ethylene Propylene Diene Monomer)										E				
C = Chemraz (Perfluoroelastomer)										C				
Cable Length (in metres)														
00 = None												00		
01 = 1 metre												01		
Specials Code														
000 = No Special Requirements														000
010 = Cleaned for Oxygen Service														010

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.