

ATM/N/Ex - Analog Level Transmitter



CUSTOMER BENEFITS

- Certificate: ATEX
- Fast customization thanks to configurable product design
- Compact design requires minimal space
- Short response times suitable for dynamic pressure measurements

For pricing or any further information, please contact Omni Instruments Ltd.

Technical Specifications

PRESSURE MEASURING RANGE (MH2O)

	1 ... 5 (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (3) ($\pm$ % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift ($\pm$ % FS/ $^{\circ}$ C)			
Zero point 0 ... 70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25 ... 85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0 ... 70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25 ... 85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH2O on request

(2) Transducer

(3) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor



TEMPERATURE RANGE

Operating temperature	-5 ... 80 $^{\circ}$ C (1)
Process temperature	-5 ... 80 $^{\circ}$ C (1)
Storage temperature	-10 ... 80 $^{\circ}$ C

(1) For operating temperature > 50 $^{\circ}$ C, PE or FEP cable must be used

For pricing or any further information, please contact Omni Instruments Ltd.

ELECTRICAL SPECIFICATIONS

	4 ... 20 mA
Power supply	10 ... 30 VDC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX APPROVAL

Certificate, (1)	SEV 11 ATEX 0142	
Gas	II 1G Ex ia IIC T3 ... T6	EN 60079-0 / -11 / -26
Dust	II 1D Ex iaD 20 IP6x T125°C ... T80°C	
Mining	I M1 Ex ia I	EN 50303
Temperature class, (2)	T6	T4
Ambient temperature	-5 ... 50°C	-5 ... 80°C
Process temperature	-5 ... 50°C	-5 ... 80°C
Maximum values of the intrinsically safe circuit	30 V / 100 mA / 1 W	

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL APPROVAL

Certificate	40869-01 HH
Field of application	C, EMC1

For pricing or any further information, please contact Omni Instruments Ltd.

QUALIFICATIONS

	Description	Level	Typical interferences
EN 61000-4-2	Electrostatic discharge	4 kV contact / 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 1 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5, (1)	Surge	10 kA (8 / 20 μ s)	Overvoltage
EN 61000-4-6	Conducted RF	10 V (0.15 ... 80 MHz, 3 s)	Frequency converters

(1) Only with optional overvoltage protection

PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, FEP
Weight (2)	108 g

(1) Hastelloy (C-276) on request

(2) Specification for a ATM/N/Ex, closed, without cable

Equipment

OVERVIEW

10.00.0091	Accessories overview
------------	----------------------

For pricing or any further information, please contact Omni Instruments Ltd.



Additional documents

OPERATING AND SAFETY INSTRUCTIONS

Article number	
10.88.0437	DMM042

For pricing or any further information, please contact Omni Instruments Ltd.

Ordering information

	X	XXX	XXXX	XX	XXX
Type					
ATM/N/Ex	34				
Pressure type					
Gauge	1				
Absolute (vacuum)	2				
Pressure measuring range					
50 mbar ... < 100 mbar	XX				
100 mbar ... 25 bar	XX				
Offset, special adjustment	99				
Process connection					
Closed (Fig. 1)	55				
Open (Fig. 2)	56				
G 1/4 M (Fig. 3)	11				
G 1/2 M (Fig. 3)	13				
Customized	99				
Electrical connection					
Connectable version, IP 68 (Fig. 4), (3)	07				
PUR cable, blue, IP 68 (4), (5)	17				
FEP cable, blue, IP 68 (4)	22				
Customized	99				
Output signal					
4 ... 20 mA	05				
4 ... 20 mA with surge protection	08				
Accuracy					
$\leq \pm 0.5 \% \text{ FS}$	0				
$\leq \pm 0.25 \% \text{ FS}$	1				
$\leq \pm 0.1 \% \text{ FS}$	2				
Temperature range					
T6 (Ta: -5 ... 50°C) -5 ... 50°C compensated (allowed process temperature: -5 ... 50°C)	3				
T4 (Ta: -5 ... 80 °C) -5 ... 80°C compensated (allowed process temperature: -5 ... 80°C)	5				
Option 1					
Option 2					
Option 3					
Ballast weight 1.4435					B
Seals: Viton (standard)					U
Seals: EPDM					S
Seals: Kalrez (Level)					T
Version titanium (without ballast weight)					K
Humidity filter element for gauge versions (only for PUR cable)					Z

(3) Connector with required cable has to be ordered separately (KART100)

(4) Please specify the required cable length and medium

(5) For operating temperature > 50°C, FEP cable must be used

Dimensions

Fig. 1: Closed version

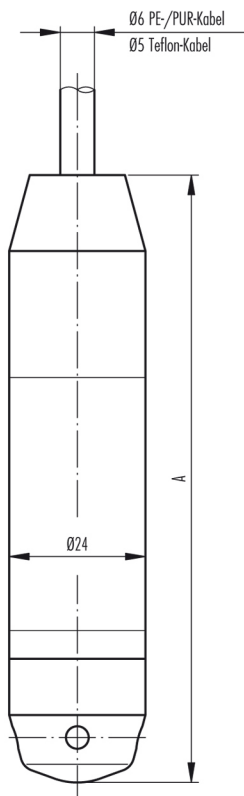


Fig. 2: Open version

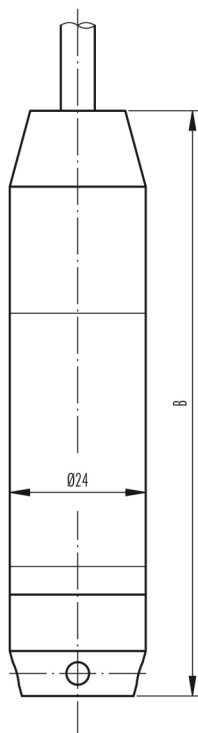


Fig. 3: with process connection


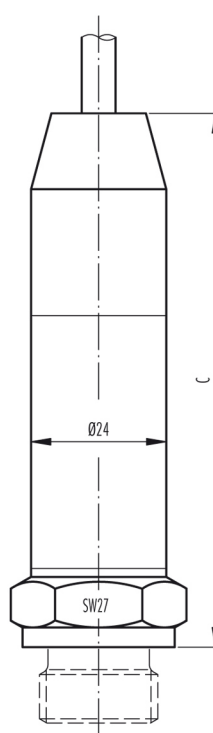


Fig. 4: Electrical connection, connectable

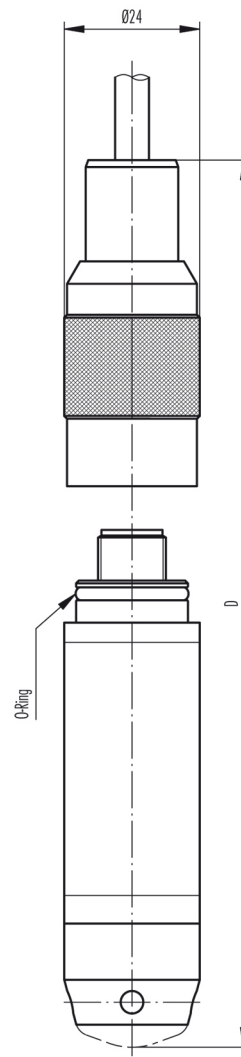

Standard	A [mm]	B [mm]	C [mm]	D [mm]	Weight[g]
without ballast weight	108	104	on request*	on request*	approx. 160
with ballast weight	195	191	on request*	on request*	approx. 420

*C: Depending on process connection

*D: Depending on process connection or version

Version with surge (lightning) protection	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	157	153	on request	on request	approx. 200
with ballast weight	244	240	on request	on request	approx. 460

Colour 2-Wire

white +Vin

yellow Pout

gray EP

For pricing or any further information, please contact Omni Instruments Ltd.