

## MSR 175 Shock Transportation Data Logger: Protect your goods!





The MSR175 shock data logger uses high-resolution sensors to continuously record what happens to your goods during transportation. The logger data can then be analysed very accurately – be it in order to ascertain damage or to improve transport packaging – using the «MSR ShockViewer» software.

The two 3-axis acceleration sensors ( $\pm 15$  g and  $\pm 200$  g) integrated in the MSR175 record shocks at a measurement frequency of up to 6400/s. The installed memory of the logger is capable of storing over 2 million measured values, which is sufficient for more than 1,000 shocks. In addition, the MSR175 measures and records temperature profiles from  $-20^{\circ}$  to  $+65^{\circ}\text{C}$ . Additionally, type variants of this data logger are available with internal humidity, pressure and light sensors.

**Easy-to-use PC software:** The software package for the MSR175 includes 3 programs: **MSR175 Dashboard**, **MSR ReportGenerator** and **MSR ShockViewer**. The MSR Dashboard allows you to configure the loggers with just a few mouse clicks. The data recorded can be quickly transferred to a computer via the USB port. A single click on the MSR ReportGenerator is sufficient to call up a compact report. For a detailed measured data analysis, the MSR ShockViewer, which is integrated in the MSR175 software package as a free basic version, is at your disposal.

### Technical Data

|                                     |                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Medium:</b>                      | Air                                                                                                                                                                                                                                                                                                                                                          |
| <b>Memory capacity:</b>             | Over 2,000,000 measurement values                                                                                                                                                                                                                                                                                                                            |
| <b>Key:</b>                         | Start measurement/retrieve status                                                                                                                                                                                                                                                                                                                            |
| <b>3-axis-acceleration sensors:</b> | 2 internal 3-axis-acceleration sensors                                                                                                                                                                                                                                                                                                                       |
| <b>Working range:</b>               | $\pm 15$ g and $\pm 200$ g ( $-20\ldots+65^{\circ}\text{C}$ )                                                                                                                                                                                                                                                                                                |
| <b>Accuracy:</b>                    | <b><math>\pm 15</math> g sensor:</b> $\pm 0.15$ g ( $0\ldots 5$ g, $+25^{\circ}\text{C}$ ), $\pm 0.3$ g ( $5\ldots 15$ g, $+25^{\circ}\text{C}$ ), <b><math>\pm 200</math> g sensor:</b> $\pm 2$ g ( $0\ldots 15$ g, $+25^{\circ}\text{C}$ ), $\pm 5$ g ( $15\ldots 100$ g, $+25^{\circ}\text{C}$ ), $\pm 10$ g ( $100\ldots 200$ g, $+25^{\circ}\text{C}$ ) |
| <b>Measurement/storage rate:</b>    | Up to 6400/s ( $\pm 15\%$ )                                                                                                                                                                                                                                                                                                                                  |
| <b>Power supply:</b>                | LiPo-battery 230 mAh, charged via the USB connection, recording period up to 8 weeks or replaceable Li-SOCl <sub>2</sub> battery, battery operating time at least 2 years                                                                                                                                                                                    |
| <b>PC software package:</b>         | MSR175 Dashboard, MSR ReportGenerator, MSR ShockViewer (basic version)                                                                                                                                                                                                                                                                                       |
| <b>Interface:</b>                   | USB                                                                                                                                                                                                                                                                                                                                                          |
| <b>Operating conditions:</b>        | Temperature $-20\ldots+65^{\circ}\text{C}$                                                                                                                                                                                                                                                                                                                   |
| <b>Storage conditions:</b>          | <ul style="list-style-type: none"> <li><math>+5^{\circ}\text{C}\ldots+45^{\circ}\text{C}</math> (ideal storage condition for the battery)</li> <li>10...95 % relative humidity, non-condensing</li> </ul>                                                                                                                                                    |
| <b>Standards:</b>                   | The MSR175 complies with EU-Directives RoHS/WEEE.                                                                                                                                                                                                                                                                                                            |

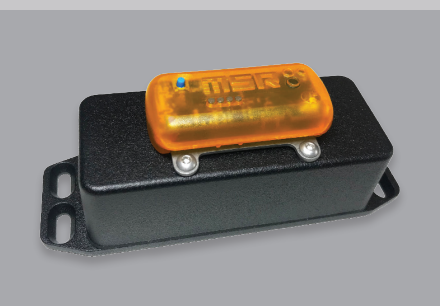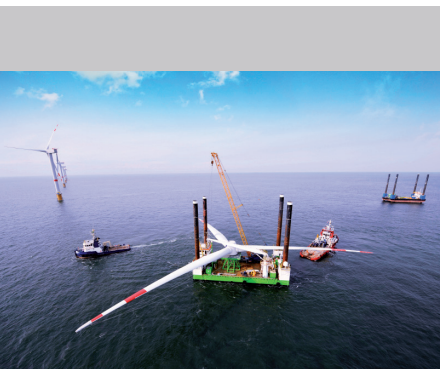

## Housing and battery selection

| IP    | Sheat material   | Battery                                      | Size (W x H x L) & Weight |
|-------|------------------|----------------------------------------------|---------------------------|
| IP 67 | PC, encapsulated | LiPo battery 230 mAh                         | 47 x 16 x 54 mm, ~ 28 g   |
|       | PC, encapsulated | LiPo battery 230 mAh                         | 47 x 16 x 54 mm, ~ 28 g   |
| IP 65 | PC, encapsulated | Li-SOCl <sub>2</sub> battery 3.6 V, 7700 mAh | 49 x 39 x 122 mm, ~ 180 g |
|       | PC, encapsulated | Li-SOCl <sub>2</sub> battery 3.6 V, 7700 mAh | 49 x 39 x 122 mm, ~ 180 g |

## Sensors

The MSR 175 data logger is equipped with two internal 3-axis-acceleration sensors ( $\pm 15$  g and  $\pm 200$  g) and one internal temperatur sensor. Other type variants feature three further internal sensors – one light, one humidity and one pressure sensor.

| Measured parameters | Working range                           | Accuracy                                                                                           | Measurement/Storage rate |
|---------------------|-----------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------|
| Temperature         | -20...+65 °C                            | $\pm 0.5$ °C (-10...+65 °C)                                                                        | every 10 min.            |
| Rel. humidity       | 0...100 % rel. humidity<br>-20...+65 °C | $\pm 2$ % rel. humidity (10...85 %, 0...+40 °C)<br>$\pm 4$ % rel. humidity (85...95 %, 0...+40 °C) | every 10 min.            |
| Air pressure        | 0...2000 mbar absolute<br>-20...+65 °C  | $\pm 2.5$ mbar (750...1100 mbar absolute, +25 °C)                                                  | every 10 min.            |
| Light               | 0...83,000 lx                           | max. sensitivity at 550 nm                                                                         | every 10 min.            |

## MSR ShockViewer software for analysing the measured data

The MSR ShockViewer analysis software, which specialises in analysing shock events and jolts, facilitates the graphical presentation and extensive data analysis of the values recorded by the MSR175 data logger. The software is capable of quickly processing millions of data points (or values) relating to dynamic processes. It allows you to clearly present the extensive measured data, and to quickly analyse and conclusively document critical events.

The MSR ShockViewer analysis software is integrated in the MSR175 software package as a free basic version.

More information:

<https://www.msr.ch/en/msr175/>

| MSR ShockViewer for MSR175                                                          | Features                                                                                                                                      |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|  | <ul style="list-style-type: none"> <li>• Detailed analysis of shock events</li> <li>• Clearly show and organise environmental data</li> </ul> |

For pricing, or any further, information please contact Omni Instruments Ltd  
Tel: +44 (0)1382 443000 or visit our website at [www.omniinstruments.co.uk](http://www.omniinstruments.co.uk)



MSR Electronics GmbH  
Authorised Distributor:



Unit 1, 14 Nobel Road  
Wester Gourdie Industrial Estate  
Dundee DD2 4UH  
Email: [info@omni.uk.com](mailto:info@omni.uk.com)  
Web [www.omniinstruments.co.uk](http://www.omniinstruments.co.uk)  
Telephone: +44 (0) 1382 443000