

FFS


high power switch for: indoor/covered tanks

This is designed for use in non-turbulent water, with fairly constant ambient temperature, such as in indoor tanks or covered reservoirs. The switching element is a microswitch, having UL, VDE and CENELEC approvals, with either 10 or 20 Amp contacts, activated by a moving stainless ball and having an electrical life of 200,000 operations.

- **WRAS Approved**
- **Cable mounting**
- **100 metre depth Capability**

Technical Specifications		10 Amp	20 Amp
Switching Power Max.	AC	750 VA	1500 VA
	DC	180W	360W
Switching Current Max. Resistive	Resistive	10 Amps	20 Amps
	DC Inductive	1Amp	2 Amps
	AC Inductive	4 Amps	8 Amps
Switching Voltage Max.	DC	110	110
	AC	250	250

Material Specifications		
Body Material	High Density Polyethylene	
Standard Cable	5 metres PVC sheathed 3 Core	
W cable for Drinking Water	WRAS approved 3 core cable	
U cable for Fuel Oils	Polyurethane sheathed 3 core cable	
Temperature range	°C	0 to 55°C
	°F	+ 32 / +131
Max. working pressure	10bar	

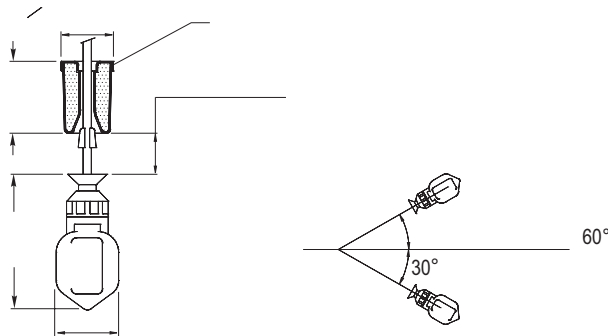

For pricing or any further information, please contact Omni Instruments Ltd.