

RAYTEMP® 38 INFRARED THERMOMETER

- Wide temperature range -59.9 to 999.9 °C
- Target distance/diameter ratio 50:1
- Robust housing for durability
- Auto power-off & backlight functions



The RayTemp 38 is a professional infrared, non-contact thermometer with dual laser dot alignment that incorporates a 50:1 optic ratio (target distance/diameter ratio), this enables users to measure small targets from a distance. The user stands a safe and comfortable distance from the target, points the thermometer at the surface to be measured, pulls the trigger and instantly reads the temperature. Ideal for measuring the surface temperature of any item that is difficult to reach. This enables the user to measure most surfaces accurately and quickly.


Measuring the surface temperature over the range of -59.9 to 999.9 °C with a 0.1 °C/°F resolution, the RayTemp 38 incorporates an auto-power-off facility that turns the instrument off after 60 seconds, this function can be disabled, if required. Each unit incorporates a backlit custom LCD display that indicates both the temperature and the emissivity. The thermometer features a four-button keypad, allowing the user to select the mode required, i.e. max, min, differential and average temperatures, view the max/min high and low alarms and adjust the emissivity from 0.1 to 1.0 in 0.01 increments (default set at 0.95).

- **Two instruments in one**

The RayTemp 38 is two instruments in one as it incorporates a thermocouple socket that will accept a type K thermocouple probe, see pages 77 to 83 for available probes. Each RayTemp 38 is supplied in a protective ABS carrying case. An optional strong magnetic holder is also available. The holder screws into the bottom of the thermometer's housing, allowing the unit to be mounted onto a metal surface for continuous monitoring.



Magnetic holder (814-150)

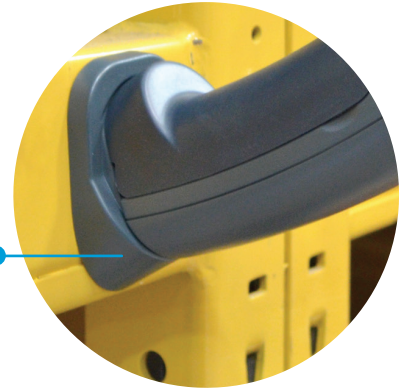

Order code	Description
814-038	RayTemp 38
814-150	Magnetic holder

The RayTemp 38 is exclusive of probe

Specification	RayTemp 38
Range - infrared	-59.9 to 999.9 °C
Resolution	0.1 °C/°F
Accuracy - infrared	±2 °C or ±2 % of reading whichever is greater
Accuracy - probe	±1 °C or ±1 % of reading whichever is greater
Field of view	Target ratio 50:1
Emissivity	0.95 default - adjustable 0.1 to 1
Battery & life	2 x 1.5 volt AAA - 180 hours continuous use
Display	Custom LCD
Dimensions	47 x 170 x 240 mm
Weight	395 grams

For pricing or any further information, please contact Omni Instruments Ltd.