

PT100 Inputs Module


8 Differential Channels **2 and 3 wires**

With Ethernet Port (6 protocols)

RME2-PT



PT100

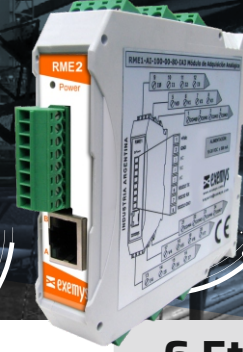

PROGRAMMABLE
WITH SCRIPTS

With the **RME2-PT**, you can accurately capture analog temperature variables from 2-wire or 3-wire PT100 sensors.

This device enables efficient communication via an Ethernet port, offering the flexibility to choose from **6 different protocols** to suit various system requirements and configurations.

GENERAL FEATURES

8 PT100 Inputs

- Differential Inputs
- PT100 - 2 or 3 wires


6 Ethernet Protocols

- Modbus TCP
- HTTP / WEB Page
- SNMP version 1
- CSV
- XML
- MQTT

TECHNICAL SPECIFICATIONS

• Network Protocol	Modbus TCP, HTTP, DHCP, ICMP, ARP, SNMP, MQTT
• Analog Inputs	8 Channels PT100
• Input Resolution	0,1°C
• Network Port	Ethernet 10/100 Mbps, Rj45 connector
• Serial Protocol	Modbus RTU/ASCII in Gateway mode
• Serial Port	1 RS-232 port
• Administration	HTTP server, password protected. RS232 Serial Console
• Upgrade	From Webpage
• Led Indicators	Power / Status / Data/Link
• Dimensions	100 mm x 22,5 mm x 112 mm (Width x Height x Depth).
• Power	+10 to +30 Vdc.
• Current	110 mA at +12 Vdc / 60 mA at +24 Vdc
• Temperature	Operation Temperature: -15 a 65 °C. Storage Temperature: -40 a 75 °C.
• Warranty	1 year

6 Ethernet Protocols

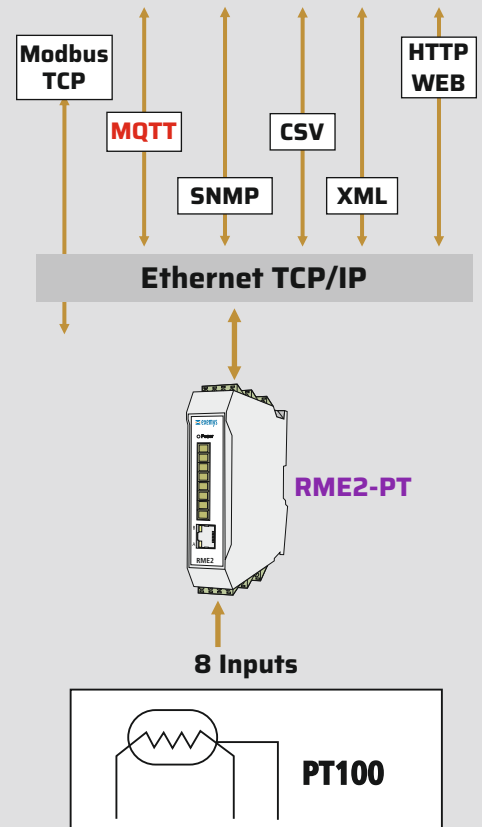

PROGRAMMABLE with SCRIPTS (Program Special Functions)

- Mathematical Operations
- Logical Operations
- Timing Operations
- Reading of the Device's Own Inputs
- Switching Digital Outputs On and Off
- Serial Port Data Interpretation
- Data Publishing via WITS Serial

ORDERING CODE

RME2-PT-100-00-80-IA3

For pricing or any further information, please contact Omni Instruments Ltd.



Measurement and data acquisition solutions

Contact Details:

Tel: +44 1382 443000
Email: info@omni.uk.com

Website: www.omniinstruments.co.uk

Mailing Address: Unit 1, 14 Nobel Road,
Wester Gourdie Industrial Estate,
Dundee, DD2 4UH.