


140W and 150W Photovoltaic modules 140J-V and 150J-V

This line of modules is the direct result of over three decades of design, manufacturing and use. Attending to every detail in the design and manufacture of our products, our process controls and testing methods have optimized module life and electrical energy production.

Ameresco Solar's off-grid module line offers the following features and benefits:


► Built to last

From mountaintops to off-shore platforms, on weather stations in the bitter cold of Antarctica and on telephone signal repeaters in the hot Australian outback, the technology has been proven in the harshest environments.




► Accessible junction box for off-grid connections

J-type junction box has accessible terminals for easier module interconnections in off-grid applications, and it allows fitting cable glands for various sections.



► Thick, durable scratch resistant back sheet

The thick back sheet provides extra insulation and increased resistance to protect your module against rough handling. Made of white polyester, it ensures longer term performance and increased energy production.



► High reliability

Cell interconnections and diode placement use well-established industry practice and are field-proven to provide excellent reliability.

ISO 9001



► Quality and certifications

ISO 9001 factory certification ensures that our manufacturing facilities use proven manufacturing and quality control processes.

Certified to UL1703 3rd Edition and ULC 1703-01
Certified for use in Class I, Division 2, Groups ABCD
Hazardous locations

Photographs are intended to portray typical module appearance, actual module appearance may vary.

Whilst every effort has been made to ensure the accuracy of this specification, we cannot accept responsibility for damage, injury, loss or expense from errors or omissions. In the interest of technical improvement, this specification may be altered without notice.

For pricing or any further information, please contact Omni Instruments Ltd.

Contact Details:

Tel: +44 1382 443000
Fax: +44 1382 453197
Email: info@omni.uk.com

Mailing Address: Unit 1, 14 Nobel Road,
Wester Gourdie Industrial Estate,
Dundee, DD2 4UH.

Website: www.omniinstruments.co.uk

Electrical characteristics

140J-V / 150J-V

	(1) STC 1000W/m ²	(2) NOCT 800W/m ²
Maximum power (P _{max})	140W / 150W	101W / 108W
Voltage at P _{max} (V _{mpp})	17.5V / 19.1V	15.6V / 17.1V
Current at P _{max} (I _{mpp})	8.0A / 8.1A	6.42A / 6.51A
Short circuit current (I _{sc})	8.2A / 8.78A	6.71A / 7.18A
Open circuit voltage (V _{oc})	22.0V / 23.0V	19.9V / 20.8V
Module efficiency	13.7% / 14.6%	
Tolerance (P _{max})		-0 / +3%
Nominal voltage		12V
Efficiency reduction at 200W/m ²	<5% reduction	efficiency 13.0% / 13.8%
Limiting reverse current		8.2A / 8.78A
Temperature coefficient of I _{sc}		0.105%/°C
Temperature coefficient of V _{oc}		-0.360%/°C
Temperature coefficient of (P _{max})		-0.45%/°C
(3) NOCT		47±2°C
Maximum series fuse rating		20A
Maximum system voltage	600V (U.S. NEC)	

1: Values at Standard Test Conditions (STC): 1000W/m² irradiance, AM1.5 solar spectrum and 25°C module temperature
 2: Values at 800W/m² irradiance, Nominal Operation Cell Temperature (NOCT) and AM1.5 solar spectrum
 3: Nominal Operation Cell Temperature: Module operation temperature at 800W/m² irradiance, 20°C air temperature, 1m/s wind speed

Mechanical characteristics

Solar cells	36 crystalline 6" silicon cells (156 x 156mm) in series
Front cover	High transmission 3.2mm (1/8th in) glass
Encapsulant	EVA
Back cover	White polyester
Frame	Silver anodized aluminum
Junction box	IP65 with 4 terminal screw connection block; accepts PG 13.5, M20 13mm (1/2") conduit, or cable fittings accepting 6-12mm diameter cable. Terminals accept 2.5-10mm ² (8-14 AWG) wire
Dimensions	1504 x 674 x 50mm / 59.2 x 26.5 x 2in
Weight	12kg / 26.5lbs

All dimensional tolerances within ±1% unless otherwise stated.

Warranty*

- ▶ Free from defects in materials and workmanship for 2 years
- ▶ 90% min. power output over 12 years
- ▶ Optional 25 years available


* Refer to warranty document for terms and conditions.

Certification

Listed to UL1703 3rd Edition & ULC ORD-C1703-01 Standard for Safety by CSA Module Fire Performance Type 4 (for USA) or Class C fire rating (for Canada)


Approved by CSA according to CAN/CSA C22.2 No. 213-17 and UL 12.12.01-Ninth Edition for use in Class I, Division 2, Groups ABCD Hazardous (Classified) Locations

For more information, call 01382 443000 or visit www.omniinstruments.co.uk.

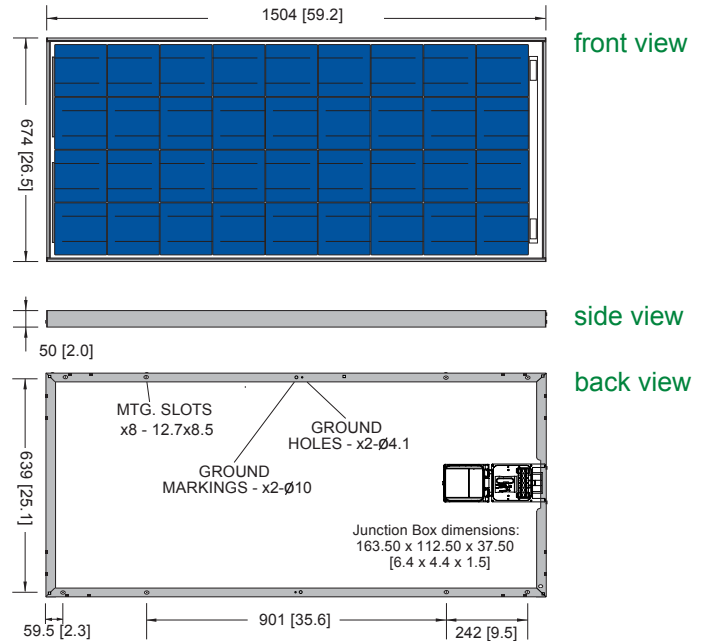

Dimensions in mm [in].

Temperature - dependence of performance (140 module)

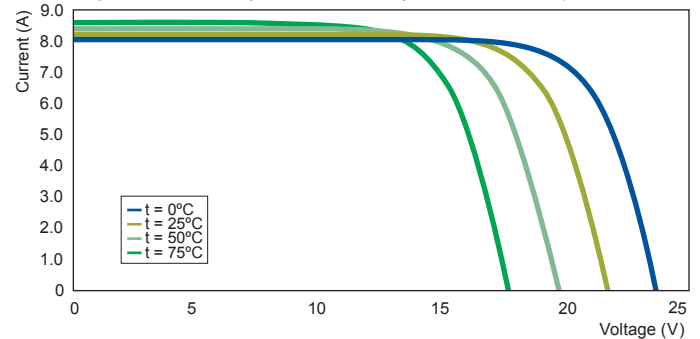

Irradiance - dependence of performance (140 module)

